

NOTES:


1.0 ELECTRICAL SPECIFICATIONS

- 1.1 FREQUENCY RANGE: DC to 18.0 GHz
- 1.2 INPUT POWER (MAXIMUM):
10 WATTS AVG. AT +25°C DERATED
LINEARLY TO 1.0 WATT AT +125°C.
- 1.3 PEAK POWER: 0.25 KW (5μSEC PULSE WIDTH).
- 1.4 OPERATING TEMP. RANGE: -54°C to +125°C.
- 1.5 IMPEDANCE: 50 OHMS.
- 1.6 VSWR (MAX.): 1.05 + 0.01 f(GHz)

2.0 MARKING

- 2.1 MARK UNIT AS SHOWN.
(REF: INK-02639-27-18)
- 2.2 STAMP END WITH "CAUTION HOT" STAMP
(REF.: INK-04494-27-01) NOTE: USE
RED INK FOR THIS STAMP ONLY.

3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

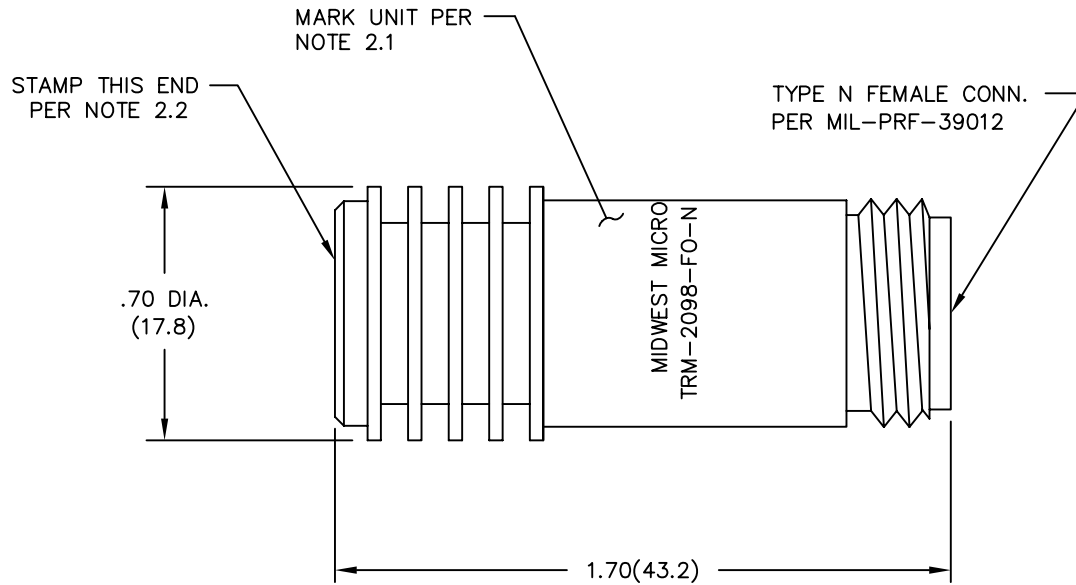

MODEL NUMBER
TRM-2098-FO-NNN-07

DWG NO. WAS: 03444-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	4/23/80
A	ECR 6545	7/6/89
A1	UPDATE MODEL NO	7/22/92
B	ON CAD/UPDATE SPECS	6/15/93
C	ECN 13716	6/23/94
C1	ADDED TITLEBLOCK	10/31/05

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power. UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'		CAGE CODE 34078	MIDWEST MICROWAVE	
		TITLE TERMINATION - TYPE N OUTLINE DRAWING		
DRAWN/DATE M.HOLLMAN 6/15/93	ENG. DATE G.KOZAK 6/17/93	DRAWING NUMBER TRM-2098-FO-NNN-07-01		REV. C1
CHECKED/DATE A.BEAITY 6/16/93	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1	