


NOTE:

1. Insulation Resistance : Min. 1500 MΩkm (After charge DC 500V for 1 min. at 20°C)
2. Dielectric Strength : No Breakdown at AC:500V for 1 min between inner conductor and outer conductor.
3. Capacitance : Nom. 95pF/m (at 1KHz)
4. Characteristic Impedance : 50±2Ω (at TDR)
5. INDIVIDUAL BAG.

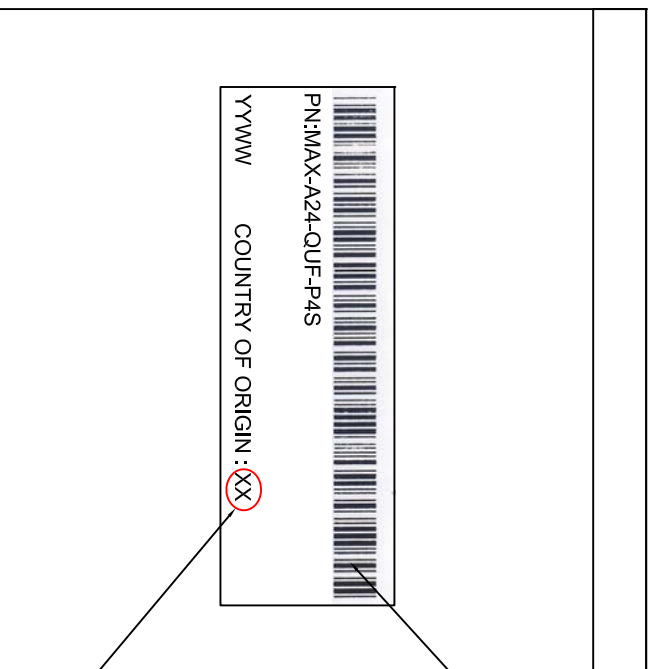

CODE 39

TW or CN

33010MAX

DWG	HIKARU	090805	SCALE: FREE	NAME: U.FL RF Conn. to Stripped
DSCN			UNIT: mm	
CHK				PART NO: MAX-A24-QUF-P4S

2	CONNECTOR	U.FL EQUIVALENT(IPEX1.37)	1	PCS	
1	WIRE	Coaxcable : KHGX-30AWG-SB-TA,GRAY OD:1.37mm	1	PCS	
NO.	MATERIAL.P/N	NAME	DESCRIPTION	QTY	UNIT

APPR	WILLIAM	090805	System Connection Inc	