

## SUMMARY

### # Wires

Low	19
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Series 2M

Termination type

IP rating 68

Cable Ø 6.50 - 13.00 mm

Matching parts HEN.2M.319.XLNP

Status

Alternative part



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FM*: Straight plug, key (N) or keys (P, R, S, T, U, V, W and X) with knurled grip and mold stop
Keying	3 keys (beta=165, gamma=30, plug: male contacts, receptacle: female contacts)
Housing Material	Environment friendly aluminium (nickel plated, anthracite color) shell and nut, other pieces bronze/brass
Cable Fixing	∅ 6.5 - 13 mm
Variant	

### Performance

Configuration	2M.319 : 19 Low Voltage
Insulator	
Rated Current	5 Amps

### Specifications

Contact Type:	Crimp
Max. Matings:	5000
Contact Retention:	22 N
Contact Dia.:	0.7 mm (0.028in)


Bucket Dia.: 0.45 mm (0.018in)  
 Min. Conductor: 0.035 mm<sup>2</sup> (AWG 32)  
 Max. Conductor: 0.09 mm<sup>2</sup> (AWG 28)  
 R (max): 6.1 mOhm  
 Test voltage (kV rms) Contact-contact: 1.55  
 Test voltage (kV rms) Contact-shell: 0.95

## Others

Humidity (max): <=95% [at 60 deg C / 140 F]  
 Vibration: 15 g [10 Hz - 2000 Hz]  
 Shock Resistance: 100 g [ 6 ms]  
 Operating temperature: -55 °C / +200 °C  
 Climatical Category: 15/200/21 (Al. shell)  
 Lighting strike EIA 364-75 10K amps - 6 times  
 EMI Shielding EIA 364-66A - 1Ghz-80 dB, 3GHz-70 dB, 6GHz- 58dB  
 IP Rating: 68

## DRAWINGS

### Draws

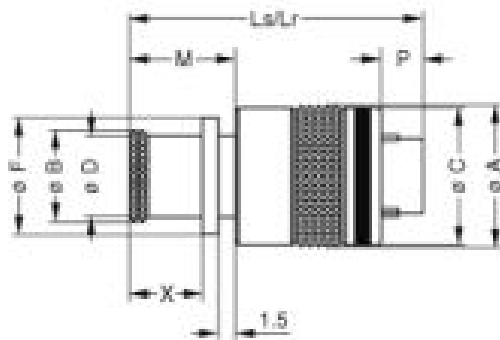

### Dimensions

	A	B	C	D	F	Lr	Ls	M	P	X
mm.	17.6	14	17.2	13	15.5	27.5	27.5	10.1	3.9	7.1
in.	0,69	0,55	0,68	0,51	0,61	1,08	1,08	0,40	0,15	0,28

## RECOMMENDED BY LEMO

### Tools

Crimp Tool: DPC.91.701.V

Crimp settings: AWG/Selector = 28-30-32/4-3-3  
Positionner: DCE.91.070.5MVC  
Extractor: DCF.93.070.4LT  
Replacement contact: FGN.0M.556.ZZC

## Cables