
T	Q	шт.	m			0	Φ	Þ	
	Z	ØS							
ω						LAYOUT SHO	VN AS EXAMPLE		
		Keying Shown	as example						
CHARACTERISTICS		I	Connector dimension	_					
-Standard : Based on	MIL-DTL-38999 Series III		Dim Nominal ØS 32.5 Max						_
-Shell Material -Shell Plating -Insulator -Contacts	: Aluminium : Olive drab Cadmium : Thermoplastic : Copper Alloy		Z 31 Max VV THREAD M22x1-6g		SOURIAU shall not be liable for any non-conformity or damage due to a use of the Products which does not comply with the Specifications issued by either of the Parties or by a third party (professional recommendation, technical notice.)				
-Seals & GrommetContact Plating	: Silicon Elastomer : Gold over copper Alloy 0.8µm min	nimum						on & Control List ot Listed	
-Durability : 500 Mating cycles -Delivered with Souriau contacts and Accessories					PN: 8D515W35PC				
-Temperature Range -Salt Spray	_: -65°C to +175°C : 500 hours				A 19-10-201	6 First Release			
	: 26.68 g ± 10%				ISS DATE	Latest modification - by	1		MOD N°
					Designed By:	Date:		USTOMER DRAWING	
					TITLE	A	luminium Plug 8D s	series	
BASIC SERIES:		15 W 35 P C			SCALE	General Tolera	nces:	NPRDS / PROJECT 859	
	andard Crimp Contact		OF	RIENTATION : C				This document is the propert SOURIAU	y of
SHELL SIZE : 15 CONTACT TYPE : PIN(500 Matings)					SOURIAU WWW.SOURIAU.COM it must not be reproduced or communicated without permission				
	Olive drab Cadmium			AYOUT : 15-35	FORMAT	SOUI	RIAU DRG N°		SHEET
PLATING : W =					A3				

r	Ŧ	۵	гт —	m		0
4	×.	Contact Layout				
	Contact position ID Loca X-axis (mm) 1 +.045 (1.14) 2 +.123 (3.12) 3 +.211 (5.36) 4 +.254 (6.45) 5 200 (0.70) 6 +.247 (6.27) 7 7 8 +.130 (3.30) 9 +.045 (1.14) 10 045 (1.14)	Contacts Contact position ID Location Y-axis (mm) Contact position ID K-axis (mm) Y-axis (mm) +262 (6.65) 20 +123 (3.12) +.119 (3.02) +247 (5.51) 21 +.170 (4.32) +.040 (1.02) +160 (4.06) 22 +.170 (4.32) 050 (1.27) +.080 (2.03) 23 +.123 (3.12) 127 (3.23) -010 (25) 24 045 (1.14) 172 (4.37) 050 (1.27) 123 (3.12) 177 (3.23) -175 (4.45) 25 045 (1.14) 172 (3.23) 123 (2.12) 177 (3.23) 232 (5.89) 27 170 (4.32) 050 (1.27) 232 (58) 28 170 (4.32) 050 (1.27) 262 (6.65) 28 170 (4.32) 040 (1.22) 050 (1.27) 262 (6.65) 28 170 (4.32) 050 (1.27) 262 (6.65) 28 170 (4.32) 040 (1.12) 191 (3.12) +.119 (3.02) 050 (1.27) 262 (6.65) 28 170 (4.32) 040 (1.32) +.104 (1.12) 262 (6.65) 28 <t< th=""><th></th><th></th><th></th><th></th></t<>				
ω	11 130 (3.30) 12 200 (5.08) 13 247 (6.27) 14 266 (6.76) 15 254 (6.47) 16 211 (5.36) 17 123 (3.12) 18 045 (1.14) 19 +.045 (1.14) (19) +.045 (1.14)	-232 (5.89) 30 -045 (1.14) +.172 (4.37) .175 (4.45) 31 +.045 (1.14) +.074 (1.88) -088 (2.49) 32 +.090 (2.29) 004 (0.10) .010 (2.5) 33 +.045 (1.14) 082 (2.08) .020 (2.03) 34 045 (1.14) 082 (2.08) .030 (2.03) 35 006 (2.29) 004 (0.10) +.160 (4.06) 35 090 (2.29) 004 (0.10) +.217 (5.51) 36 045 (1.14) 027 (1.18) .426 (6.65) 37 +.000 (0.00) 004 (0.10)	2 2 2 2 3 5			
						SOURIAU shall not be liable for an due to a use of the Products w the Specifications issued by either o (professional recommenda
N						Count FR PN: 8D515
					A 19-10-20 ISS DATE Designed By:	116 First Release Latest modification - by Date:
					SCALE NA	General linear Tolerances:
					FORMAT A3	U WWW.SOURIAU. SOURIAU 8D515W
l	Н	G	F	E	D	C

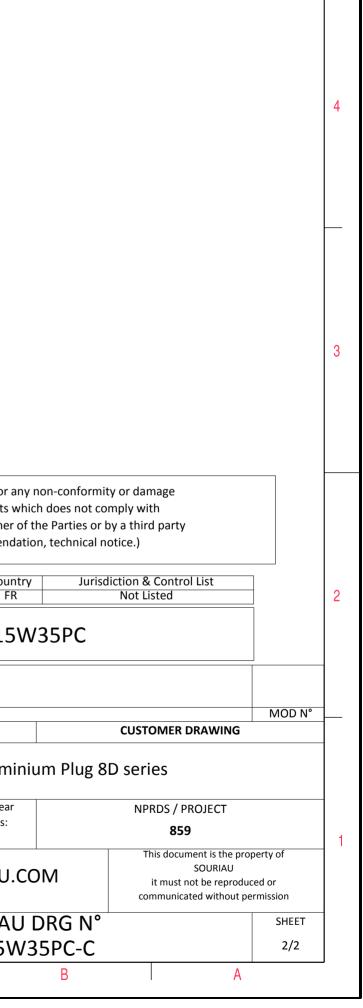

 \triangleright

σ