


PIN ASSIGNMENT			
P1		P2	
1	—	1	1
2	—	2	2
3	—	3	3
4	—	4	4
SHEEL	—	SHEEL	—

- Electronic Test:
- 1.100% Test,(Open,Short,Miss Wire)
  - 2.Contact Resistance:3 ohm max.
  - 3.Insulation Resistance:20M ohm min.
  - 4.Hi-Pot:300V DC/10ms

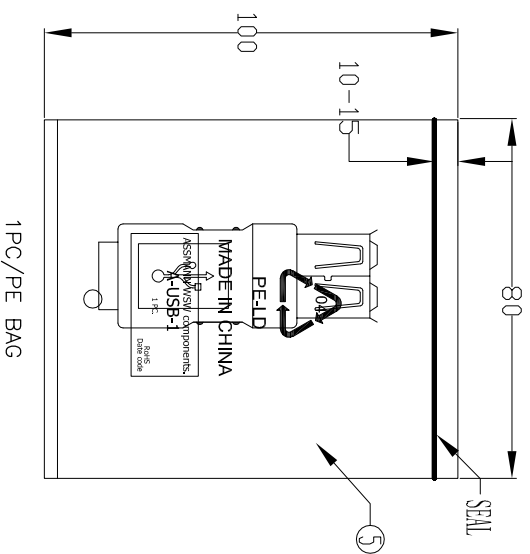

⑥	PE BAG	1/10	CLEAR SIZE:170*250*0.05mm PRINT BLACK*MADE IN CHINA*+*10PCS"
⑤	PE BAG	1	CLEAR SIZE:80*100*0.05mm PRINT BLACK*MADE IN CHINA*+*1PC"
④	OUT JACKET	6g	BEIGE(IV-29) 40P PVC
③	IN JACKET	4g	CLEAR LDPE
②	CABLE	5	28AWG wire, L=30MM
①	CONN	1	USB A FEMALE,SHELL NICKEL PIN GOLD FLASH SHORT BODY
①	CONN	1	USB B FEMALE,SHELL NICKEL PIN GOLD FLASH SHORT BODY

NO. NAME Q'TY SPECIFICATION

**RoHS compliant**

Unit: mm

1PC/PE BAG

Scale	Free	Customer-No.	
TOLERANCE		Drawn	20.02.2017 Amy
		Approved	20.02.2017 Amy
		ASSMANN WSW-No. A-USB-1	
DIM TOL		Drawing-No. ASS 7875 CA rev00	
		Replace Sheet	
Angle TOL		Drawing-No. ASS 7875 CA rev00	
		Replace Sheet	
①	Drawn	Date 20.02.2017 Name Amy	
Modification		Date Name	

**ASSMANN**  
WSW components

1 2 3 4 5 6 7

A B C D E F G H