


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS
- 1.1 FREQUENCY RANGE:DC to 12.4 GHz
- 1.2 MAXIMUM INPUT POWER:
AT +25°C: 2 WATTS
AT +125°C: 0.5 WATTS
- 1.3 OPERATING TEMPERATURE RANGE:
-55°C to +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 MAXIMUM VSWR:
DC to 4.0 GHz: 1.07:1
4.0 to 12.4 GHz: 1.12:1

- 2.0 MARK UNIT AS SHOWN.
- 3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

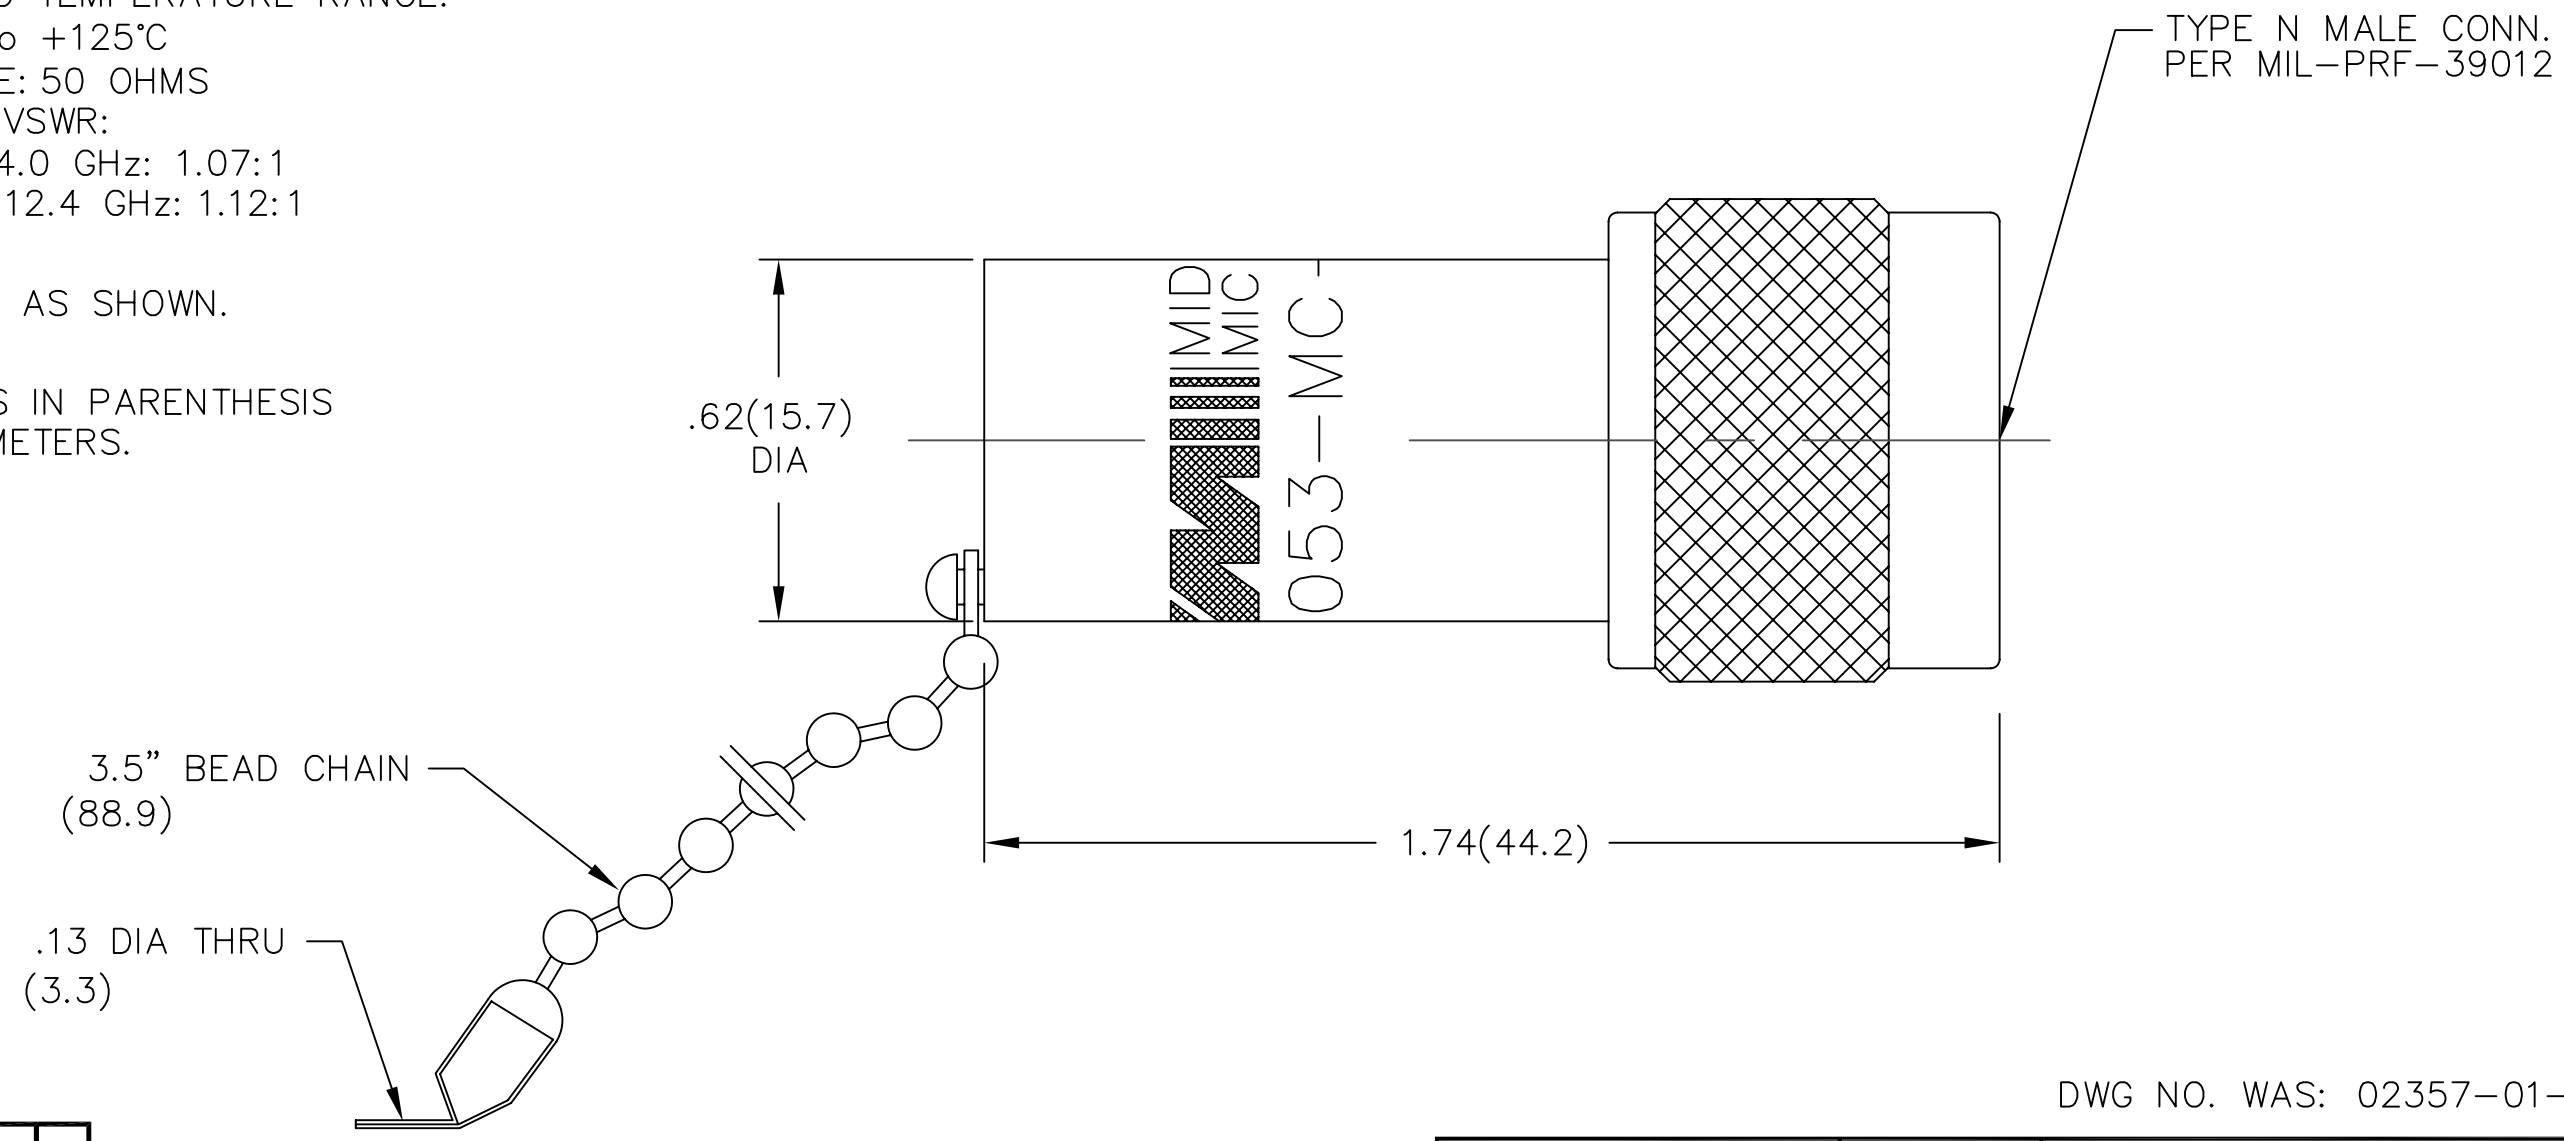

DWG NO. WAS: 02357-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	3/21/92
A	ECR 6545	6/27/89
A1	REDRAW ON CAD-UPDATE	3/27/92
	MARKING. ADD SPECS.	
B	ECN 12868	8/23/93
C	ECN 13622	5/16/94
C1	ADDED TITLEBLOCK	10/26/05
F	ECO 23134	1/3/11

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.

UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
 3 PLACE DECIMALS ±.005
 2 PLACE DECIMALS ±.02
 FRACTIONS ±1/64
 PARALLELITY: T.I.R. _____
 FLATNESS: T.I.R. _____
 CONCENTRICITY: T.I.R. _____
 ANGLES AND PERPENDICULARITY: ±1'

CAGE CODE 34078		MIDWEST MICROWAVE	
		TITLE TERMINATION OUTLINE DRAWING	
		DRAWING NUMBER TRM-2053-MC-NNN-02-01	REV. F
DRAWN/DATE A.BEATTY 3/27/92 CHECKED/DATE	ENG./DATE G.KOZAK 3/30/92 APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1