
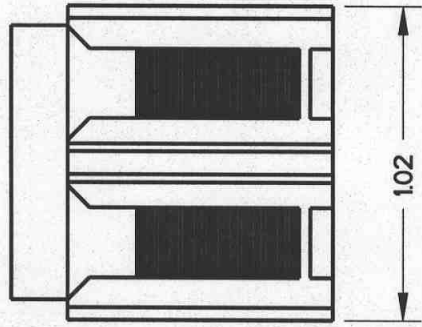
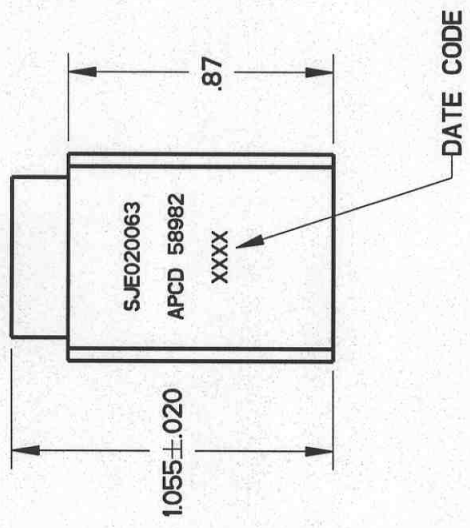
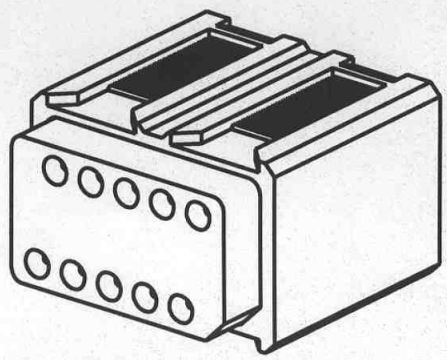


REV	ECN	APPD
1		AD 3/16/09

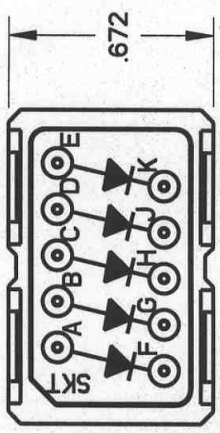

**NOTES:**

1. MATERIALS:  
 BODY: POLYETHERIMIDE PER ASTM-D5205  
 GROMMET: SILICONE BLEND ELASTOMER.  
 DIODE: JANTXIN3613, QTY: 5.  
 INTERNAL PIN CONTACT:  
 COPPER ALLOY, HARD GOLD PLATE PER MIL-DTL-45204.  
 PERFORMANCE SPECIFICATION PER MIL-T-81714.  
 (SUBJECT TO LIMITATIONS OF THE ELECTRONIC COMPONENTS)  
 TEMPERATURE: -65° C TO 200° C.  
 INSULATION RESISTANCE: 5000 MEGOHMS MIN AT 25° C.  
 DIELECTRIC WITHSTANDING VOLTAGE:  
 1500 VRMS AT SEA LEVEL,  
 AND 200 VRMS AT 100,000 FT. ALTITUDE.  
 CURRENT RATING: 7.5A FOR SIZE 20 CONTACTS.  
 VIBRATION AND SHOCK: PER MIL-T-81714 PARA 3.5.8 & 9.  
 MODULE ACCEPTS SOCKET CONTACTS (0) M39029/22-192.  
 MODULE TO BE MOUNTED ON M81714/67 RAIL SYSTEM.

<b>DIMENSIONS</b> ANSI Y14.5M UNITS: INCHES Pro/E FILE		<b>TOLERANCES</b> XX ±0.01 XXX ±0.005 ANGLES ±1.0°		<b>PROJECTION</b> 		<b>Amphenol Pcd</b> SPECIFICATION DRAWING ENGR J. ADAMS 03/16/09 CHKD APPD  3/16/09		<b>TITLE</b> SJE ELECTRONIC MODULE JANTXIN3613	
<b>ORIGINAL</b>		THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION WHICH IS THE CONFIDENTIAL PROPERTY OF AMPHENOL PCD BEVERLY, MA, USA		SIZE <b>A</b>		DWG NO. <b>SJE020063_C</b>		REV <b>1</b>	
				CODE: 58982		SCALE: NONE		SHEET 1 OF 1	