

## SUMMARY

### # Wires

Low	10
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	P
Termination type	Female solder
IP rating	50
Cable Ø	0.00 - 0.00 mm
Matching parts	
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	PK*: Fixed receptacle with 1 nut (without 2nd front nut)
Keying	2 keys (alpha=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PEI (Polyetherimide), gray
Cable Fixing	∅ 0 - 0 mm
Variant	Z : without front nut

### Performance

Configuration	1P.M10 : 10 Low Voltage
Insulator	
Rated Current	3 Amps

### Specifications

Contact Type: Solder
Max. Matings: 2000
Contact Dia.: 0.5 mm (0.0201in)
Bucket Dia.: 0.45 mm (0.018in)
Max. Solid Conductor: 0.09 mm <sup>2</sup> (AWG 28)
Max. Stranded Conductor: 0.09 mm <sup>2</sup> (AWG 28)

R (max): 8.5 mOhm  
Test voltage (kV rms) Contact-contact: 0.85  
Air clearance min. (mm) or Creepage distance min. (mm): 0.45


## Others

F ret (min): 50 N  
F ret (max): 150 N  
IP Rating: 50

---

# DRAWINGS

## Draws

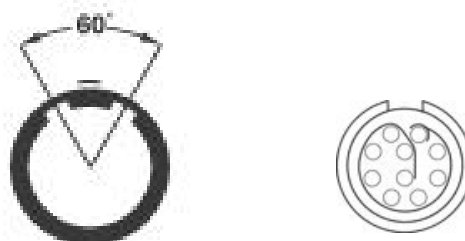

## Dimensions

	A	Lmax
mm.	19.5	33.5
in.	0,77	1,32

---

# RECOMMENDED BY LEMO

## Tools

None

## Cables

CMN.10.T22.068QGC			
-------------------	--	--	--