THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION -,- .
© COPYRIGHT - By - ALL RIGHTS RESERVED.

LOC	DIST
FT	0

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	M	REVISED PER ECO-16-001351	02FEB2016	NK	MZ



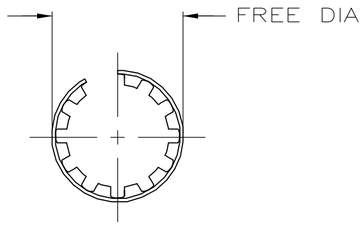

STYLE A
(FEMALE)





STYLE B
(STRIP)

	L	STYLE	LH	(FREE DIA)	MAT'L (NOTE)	MATING PIN ø REF	PLATING NOTE NO.	NUM LOUV	MAT'L THK	REF	PART NUMBER
9	–	A	[.034]	[.40]	5	8.38[.330]	12	19	0.15[.006]	–	3-192040-9
9	–	A	[.034]	[.40]	5	8.38[.330]	6	19	0.15[.006]	–	3-192040-8
	–	A	[.034]	[.40]	5	8.38[.330]	UNPL	19	0.15[.006]	–	3-192040-7
	–	A	[.034]	[.40]	5	8.38[.330]	11	24	0.15[.006]	–	3-192040-6
9	–	A	[.034]	[.40]	5	8.38[.330]	UNPL	24	0.15[.006]	–	3-192040-5
9	–	A	[.036]	[.40]	5	8.38[.330]	11	24	0.20[.008]	–	3-192040-4
9	–	A	[.036]	[.40]	5	8.38[.330]	UNPL	24	0.20[.008]	–	3-192040-3
9	–	A	[.038]	[.32]	5	8.00[.315]	3-2	22	0.15[.006]	–	3-192040-2
9	–	A	[.030]	[.32]	8	6.35[.250]	UNPL	18	0.15[.006]	–	3-192040-1
9	–	A	[.030]	[.42]	5	8.00[.315]	3-2	22	0.15[.006]	–	3-192040-0
9	–	A	[.034]	[.42]	5	7.93[.312]	1-2	25	0.20[.008]	–	2-192040-9
7 9	1000'	B	[.034]	–	5	–	6	–	0.15[.006]	–	2-192040-8
OBSOLETE	–	A	[.043]	[.34]	5	6.35[.250]	3-2	18	0.15[.006]	–	2-192040-7
OBSOLETE	–	A	[.032]	[.55]	5	10[.394]	1-2	30	0.15[.006]	–	2-192040-6
OBSOLETE	–	A	[.032]	[.55]	5	10[.394]	UNPL	30	0.15[.006]	–	2-192040-5
	–	A	[.030]	[.31]	5	7.11[.280]	UNPL	20	0.15[.006]	03153	2-192040-4
	–	A	[.038]	[.50]	5	9.53[.375]	UNPL	27	0.20[.008]	–	2-192040-3
	–	A	[.030]	[.62]	5	12.7[.500]	UNPL	36	0.15[.006]	–	2-192040-2
	–	A	[.034]	[1.00]	5	17.98[.708]	UNPL	53	0.20[.008]	–	2-192040-1
	–	A	[.030]	[.20]	5	2.99[.118]	UNPL	11	0.15[.006]	–	2-192040-0
	–	A	[.030]	[.19]	5	2.99[.118]	UNPL	10	0.15[.006]	–	1-192040-9
	–	A	[.030]	[.18]	5	2.66[.105]	UNPL	9	0.15[.006]	–	1-192040-8
OBSOLETE	–	A	[.030]	[.18]	5	2.31[.091]	UNPL	8	0.15[.006]	–	1-192040-7
	–	A	[.030]	[.15]	5	2.03[.080]	UNPL	7	0.15[.006]	–	1-192040-6
	–	A	[.030]	[.15]	5	1.70[.067]	UNPL	6	0.15[.006]	–	1-192040-5
	–	A	[.034]	[.23]	5	3.99[.157]	UNPL	13	0.20[.008]	–	1-192040-4
	–	A	[.030]	[.23]	5	3.99[.157]	UNPL	13	0.15[.006]	–	1-192040-3
	–	A	[.034]	[.21]	5	3.17[.125]	UNPL	12	0.20[.008]	–	1-192040-2
	–	A	[.030]	[.21]	5	3.51[.138]	UNPL	12	0.15[.006]	–	1-192040-1
OBSOLETE	–	A	[.030]	[.31]	5	7.11[.280]	3-2	20	0.15[.006]	03154	1-192040-0
OBSOLETE	–	A	[.034]	[.52]	5	9.53[.375]	UNPL	29	0.20[.008]	03151	192040-9
	–	A	[.034]	[.52]	5	9.53[.375]	3-2	29	0.20[.008]	03152	192040-8
	–	A	[.034]	[.33]	5	6.0[.236]	1-2	17	0.15[.006]	–	192040-7
	–	A	[.038]	[2.50]	5	45.0[1.772]	3-2	--	0.20[.008]	03056	192040-6
OBSOLETE	–	A	[.038]	[2.00]	5	41.3[1.625]	3-2	--	0.20[.008]	03054	192040-5
	–	A	[.038]	[1.70]	5	34.9[1.375]	3-2	--	0.20[.008]	03080	192040-4
10	–	A	[.038]	[1.50]	5	30.5[1.200]	1-2	88	0.20[.008]	03127	192040-3
OBSOLETE	–	–	–	[1.20]	5	25.3[.996]	3-2	--	0.20[.008]	03052	192040-2
10 OBSOLETE	–	A	[.038]	[1.00]	5	19.0[.750]	1-2	56	0.15[.006]	03144	192040-1

1 FINISH: SILVER PLATE 200 uIN MINIMUM.

2 FINISH: NICKEL PLATE 40 uIN MINIMUM.

3 FINISH-GOLD PLATE 10 uIN MINIMUM.

4 PLATING NOTES ARE TO BE INTERPRETED AS FOLLOWS, 3-2 AS 3 OVER 2.

5 MATERIAL: CDA172, BeCu.

6 FINISH: PREPLATED SILVER 200 uIN MIN OVER NICKEL 40 uIN MIN.
PARTS ARE PLATED PRIOR TO STAMPING AND WILL HAVE UNPLATED EDGES.

7 REELED PRODUCT.

8 STAINLESS STEEL (ELGILOY).

9 PRELIMINARY PART NUMBER.

10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

11 FINISH: TIN PLATE 300 uIN MINIMUM.

12 FINISH: PREPLATED GOLD 10 uIN MIN OVER NICKEL 40 uIN MIN.
PARTS ARE PLATED PRIOR TO STAMPINGS AND WILL HAVE UNPLATED EDGES.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± -
1 PLC ± -
2 PLC ± .02
3 PLC ± .010
4 PLC ± -
ANGLES ± -

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN RA JAYNE 08-07-92
CHK J.TURNER 07-15-93
APVD — –
PRODUCT SPEC —
APPLICATION SPEC —
WEIGHT —

TE Connectivity

NAME: CONTACT BAND,FEMALE

SIZE A2 | CAGE CODE 00779 | DRAWING NO C-192040 | RESTRICTED TO —

CUSTOMER DRAWING | SCALE 2:1 | SHEET 1 OF 1 | REV M

192040

1471-9 (3/11)